

Specifications

Controller With Four Network Ports TS962

V1.5 2018. SEP

Overview:

TS962 is a controller with 4 network ports, which supports full/double/single color LED screen. It supports up to 2.6 million pixels, realizes auto-adjusting brightness by external brightness sensor and cascade function.

Official website: www.linsn.com

Add: Floor 15&16, Jiajahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

Features:

- 1) One DVI video signal input; One HDMI video signal input;
- 2) One DVI video signal loop out; One HDMI video signal loop out;
- 3) Supports fetching back RCG file;
- 4) Supports broadcasting RCG file;
- 5) Supports broadcasting CON file;
- 6) One Audio signal input;
- 7) With four network output ports, supports common video source, like 2560x1024,1920x1200,2048x1152;
- 8) With LCD display panel, supports adjusting brightness by rotary button;
- 9) Supports auto-adjusting brightness (requires light sensor).
- 10) Quick setup without PC;
- 11) Supports cascade function.

Appearance: _____



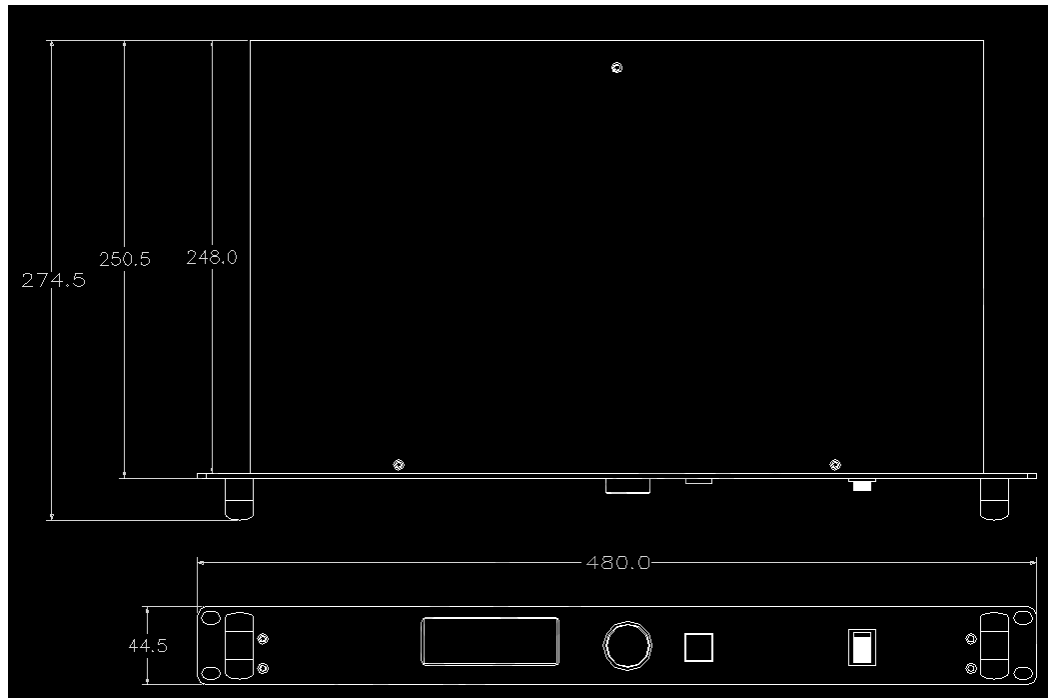
| Interface introduction | |
|------------------------|---|
| ① | LCD display panel |
| ② | Rotate to select; press down to confirm the selection |
| ③ | Menu/return button |
| ④ | Power button/ indicator |
| ⑤ | UART-IN: cascade input; UART-OUT: cascade output |
| ⑥ | 3.5mm audio input |
| ⑦ | USB connector for setup |
| ⑧ | HDMI signal input |
| ⑨ | DVI signal input |
| ⑩ | HDMI signal loop out |
| ⑪ | DVI signal loop out |

Official website: www.linsn.com

Add: Floor 15&16, Jiajahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

| | |
|---|--|
| ⑫ | 4 gigabit network ports |
| ⑬ | Indicator: red for power; green for signal |
| ⑭ | Power input: AC100~240V |

Dimensions:

Working Conditions:

| | |
|---------------------------------|---------------------|
| Power Consumption (W) | 20 |
| Working Temperature (°C) | -20°C ~ 75°C |
| Working Humidity (%) | 0% ~ 95% |
| Weight (KG) | 3 |
| Dimensions | 1U |

END

 Official website: www.linsn.com

 Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
 Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968