

# Ethernet Port Distributor DIS-300 specification


Ver 1.0.0 2014-3-25

## 1 Introduction



DIS-300 is specialized for multi-screens and super large led screens. The card possesses two input ports and eight output ports, enabling that one split to eight and two split to four. Functions change automatically. Each RJ45 port can be independently adjusted, and support read back parameters from scan board.

## 2 Dimensions and interface

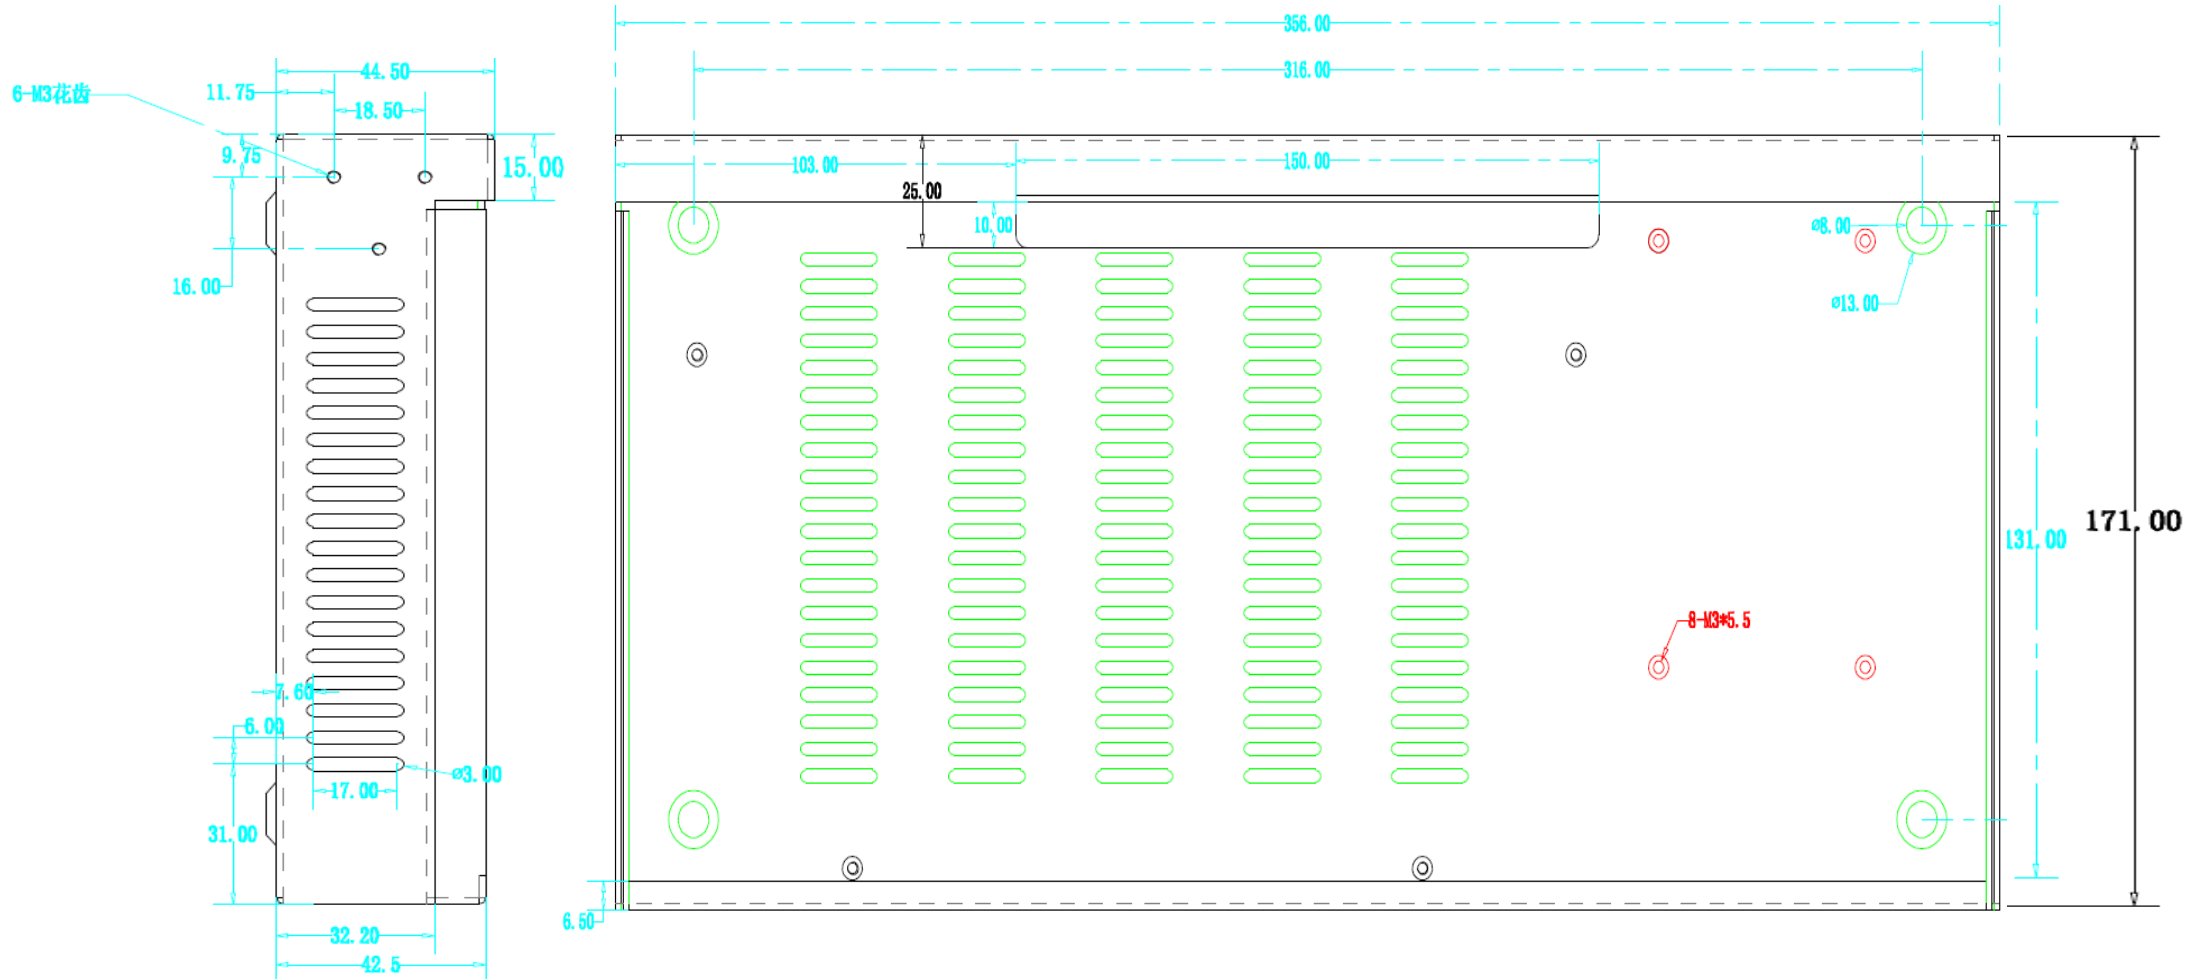

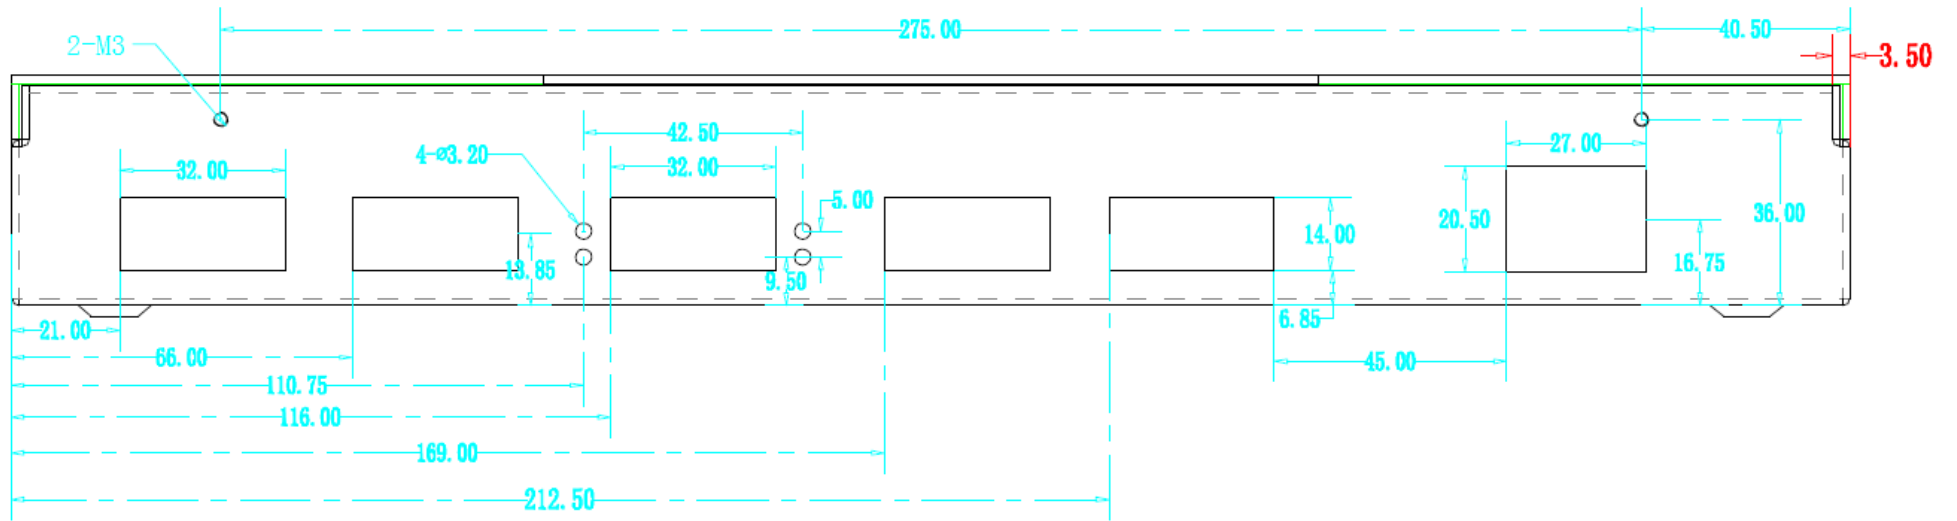


Fig. 2-1 DIS-300 Dimensions

### 3 Working conditions

Rated voltage (V)	5	Maximum	6	Minimum	4.7
Rated current (A)	0.68	Maximum	1.0	Minimum	0.29
Rated power (W)	3.40	Maximum	6.0	Minimum	1.363
Temperature of working environment (°C)	-20°C~75°C				
Humidity of working environment (%)	0%~95%				