


X3p




Key Features

- Support for HDR
- Modular Design throughout for input and output
- Hot swap input and output modules
- 4K@60 inputs compatible including HDMI 2.0, DisplayPort1.2
- Up to 12G-SDI Input option
- Support for H.264 streaming input
- Standard with Dual Preview Streaming Module
- Preview 16 inputs
- 4K/2K EDID Management
- Multiple operation modes
- Support for 3D signal
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

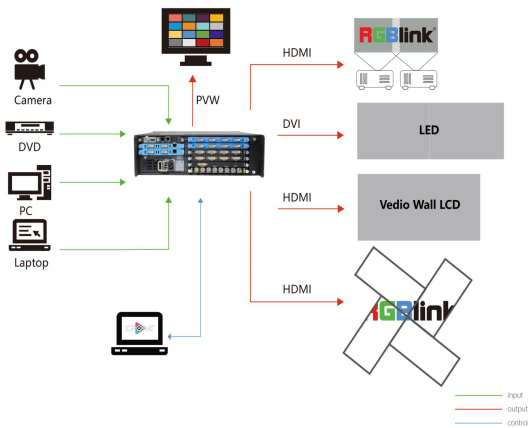


Dimensions

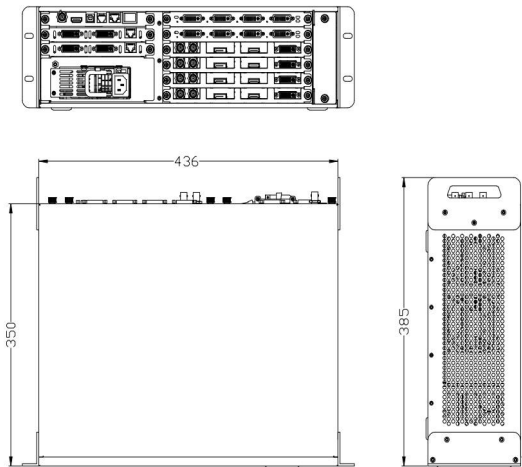

Order Codes

Product Code	Item
310-1003-11-0	X3p (Standard with PVW)
310-0003-11-0	X3 Express (PVW not Supported)
190-0003-01-0	Quad DVI Input Module
190-0003-35-0	Quad HDMI Input Module
190-0003-03-0	Quad VGA Input Module
190-0003-14-0	Quad 3G SDI Input/Loop Module
190-0003-06-0	Quad CVBS Input /Backup Module
190-0003-07-0	Quad USB Input Module
190-0003-11-0	4K@30 Digital Input Module
190-0003-15-0	4K@60 Digital Input Module
190-0003-13-0	Quad H.264 Input Module
190-0003-17-0	12G SDI Input Module
190-0003-18-0	Quad HDBaseT Input Module



Product Code	Item
190-0003-21-0	Quad DVI Output Module
190-0003-22-0	Quad 2K HDMI Output Module
190-0003-24-0	Quad 3G SDI Output Module
190-0003-25-0	Quad HDBaseT Output Module
190-0003-27-0	H.264 Output Module
190-0003-28-0	ARO Rotation Module
190-0003-33-0	PVW Module
190-0003-38-0	Dual 4K HDMI Output Module
950-0005-00-0	Power Supply 400W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	4 slots, up to 16 inputs <i>Select from</i>		4K@60 Module 12G SDI Module 4K@30 Module 3G SDI Module 2K HDMI Module DVI Module H.264 Module HDBaseT Module VGA Module CVBS Module USB Module	1xDVI-I 2 x HDMI-A 1 x DisplayPort 4xBNC 2xDVI-I 2xHDMI-A (1 In/1 Loop) 2xDisplayPort (1 In/1Loop) 8xBNC (4 In 4 Loop) 4xHDMI-A 4xDVI-I 4xRJ45 4xRJ45 4xDB15 8xBNC (4 In 4 backup) 4xUSB-A	
	Output	2 slots, up to 8 outputs <i>Select from</i>		3G SDI Module 2K HDMI Module DVI Module HDBaseT Module 4K HDMI Module H.264 Module Rotation Module	4xBNC 4xHDMI-A 4xDVI-I 4xRJ45 2xHDMI-A 4xRJ 45 2xHDMI-A 4xDVI-I	
	PVW	2 slots , standard with	2 x PVW Module	2xDVI I 1xRJ 45 (Each Module) X3p only		
	Communication		LAN RS 232 USB Genlock/Sync	1xRJ 45 1xRJ 11 1xUSB-B 1xBNC 1xHDMI-A		
	Power	2 slots	Up to 2 power Inputs		1xIEC (each PSU)	
Performance	Input Resolutions	SDI SMPTE HDMI DP SMPTE VESA DVI HDBaseT SMPTE VESA CVBS SMPTE VGA VESA H.264	720p@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/59.94/60 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x812@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 480i 576i 800x600@60 1024x768@60 1280x960@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080			
	Output Resolutions	<i>Select from below or configure customized</i>		SDI SMPTE DVI HDBaseT SMPTE VESA H.264 (PVW) HDMI SMPTE VESA		720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 720p@50/59.94/60 1080p@50/59.94/60 800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60 176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@ 4096x2160@60
	Supported Standards	SDI HDMI DP DVI HDBaseT	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI, MADI 2.0 1.2 Dual Link 1.0	VGA USB H.264	UXGA 2.0 MPEG-4/AVC	
	Grey Level	12 bit				
	Color Space	4:4:4				
Power	Input Voltage	AC 100V-240V, 50/60Hz				
	Max Power	400W				
Enviroment	Temperature	0°C ~55°C				
	Hudmidity	10%~90%				
Physical	Weight	Net (Device)	12.3kg			
		Packaged	20.4kg			
	Dimension	Net (Device)	485mmx387mmx135mm			
Packaged		635mmx545mmx275mm				

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgblink.com

