









- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
  3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty

# Applications


- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

LUS CHICKET ENDING THE PROPERTY OF THE PROPERT

# Description

HLG-320H series is a 320W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-320H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40 $^{\circ}$ C ~ +90 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-320H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding

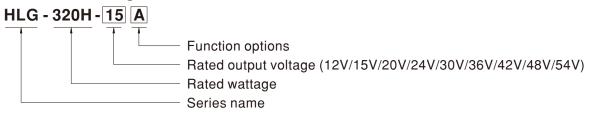

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
С		Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



## 320W Constant Voltage + Constant Current LED Driver


#### **SPECIFICATION**

	HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A
	264W	285W				320.4W	321.3W		321.3W
									350mVp-p
VOLTAGE ADJ. RANGE						32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V
						12 221	1	1.7	1.0
CURRENT ADJ. RANGE			,			4.45 ~ 8.9A	3.8 ~ 7.65A	3 35 ~ 6 7A	2.97 ~ 5.9
VOLTAGE TOLERANCE Note.3									±1.0%
									±0.5%
									±0.5%
						_ 0.070	_ 0.070	- 0.070	= 0.070
TIOLD OF TIME (Typ.)									
VOLTAGE RANGE Note.5				IC" section)					
EDECUENCY DANCE									
FREQUENCT KANGE									
POWER FACTOR (Typ.)	PF≧0.98/115VAC, PF≧0.95/230VAC, PF≧0.94/277VAC @ full load								
	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
TOTAL HARMONIC DISTORTION		_		_		C)			
	<u> </u>			<u> </u>			I	I	I
									95%
						95%	95%	95%	95%
( ) ( )	3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC								
INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
MAX. No. of PSUs on 16A CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC								
LEAKAGE CURRENT	<0.75mA / 277	7VAC							
OVER CURRENT No. 4	95 ~ 108%								
OVER CURRENT Note.4	Constant current limiting, recovers automatically after fault condition is removed								
SHORT CIRCUIT	Hiccup mode,	recovers auto	matically after	fault condition	is removed				
	14 ~ 17V								
OVER VOLTAGE	Shut down and latch off o/p voltage, re-power on to recover								
OVER TEMPERATURE	Shut down and latch off o/p voltage, re-power on to recover								
	Tcase= -40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	,								
			na						
,	· · · · · · · · · · · · · · · · · · ·								
	·		lo pariod for 7	72min . ooob old	ang V V 7 aya				
VIDICATION							2 42 ENG220	1 indonandants	
SAFETY STANDARDS									
OAI ETT OTANDARDO									
	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
ISOLATION RESISTANCE	Compliance to EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class C (@ load≥50%); EN61000-3-3, EN61000-3-3, GB17743 and GB17625.1,EAC TP TC 020								
EMC EMISSION	GB17743 and	GB17625.1,E		= 1104= := =:	=004 ··· ·				
	GB17743 and	GB17625.1,E EN61000-4-2		EN61547, EN5	5024, light indu	ustry level (sur	ge immunity Li	ne-Earth 4KV, I	Line-Line 2K
EMC EMISSION	GB17743 and Compliance to	GB17625.1,E EN61000-4-2 20			5024, light indu	ustry level (sur	ge immunity Li	ne-Earth 4KV, I	Line-Line 2K
EMC EMISSION EMC IMMUNITY	GB17743 and Compliance to EAC TP TC 02	GB17625.1,E. EN61000-4-2 20 n. MIL-HDE	,3,4,5,6,8,11, I		5024, light indu	ustry level (sur	ge immunity Li	ne-Earth 4KV, I	Line-Line 2K
	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE  CURRENT ADJ. RANGE  VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.)  VOLTAGE RANGE Note.5 FREQUENCY RANGE  POWER FACTOR (Typ.)  TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) (230Vac) EFFICIENCY (Typ.) (277Vac) AC CURRENT (Typ.) INRUSH CURRENT(Typ.) INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT Note.4	DC VOLTAGE  CONSTANT CURRENT REGION Note.4  RATED CURRENT  RATED POWER  RIPPLE & NOISE (max.) Note.2  CURRENT ADJ. RANGE  VOLTAGE TOLERANCE Note.3  LINE REGULATION  LOAD REGULATION  LOAD REGULATION  SETUP, RISE TIME  Note.5  POWER FACTOR (Typ.)  COLTAGE RANGE  POWER FACTOR (Typ.)  COLTAGE RANGE  POWER FACTOR (Typ.)  COLTAGE RANGE  POWER FACTOR (Typ.) (230Vac)  PF≥0.98/115  (Please refer to the color of the	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE   12V   15V   20V   24V   30V   36V   36V   CONSTANT CURRENT REGION Note A   6-12V   7.5-15V   10-20V   12-24V   15-30V   18-36V   RATED CURRENT   22A   19A   15A   13.34A   10.7A   8.9A   ARTED CURRENT   22A   19A   15A   300W   320.16W   321W   320.4W   320 W   320 W	DC VOLTAGE	DC VOLTAGE

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf


### ■ BLOCK DIAGRAM

Fosc: 65KHz

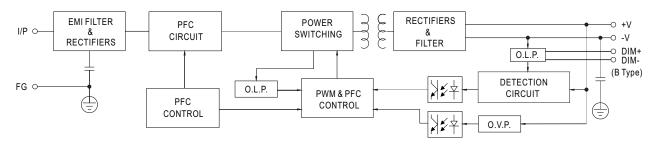

### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

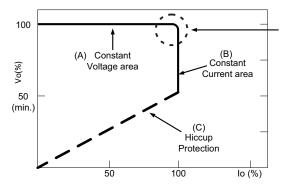


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




### ■ DIMMING OPERATION

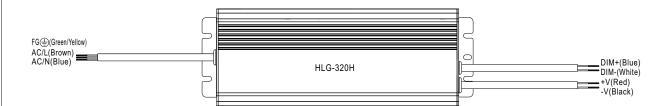


#### ※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC

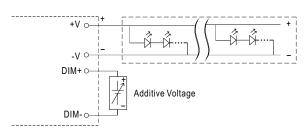


"DO NOT connect "DIM- to -V"

 $\bigcirc$  Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

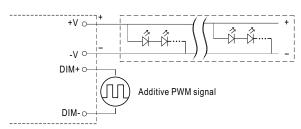



"DO NOT connect "DIM- to -V"


Applying additive resistance:

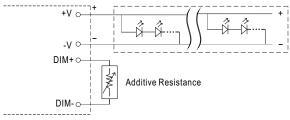


"DO NOT connect "DIM- to -V"








Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

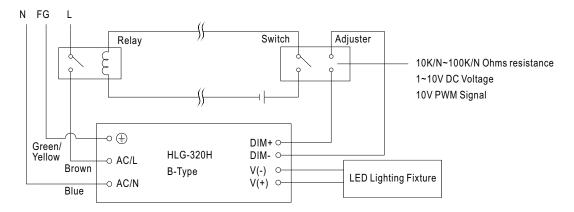


Using a switch and relay can turn ON/OFF the lighting fixture.



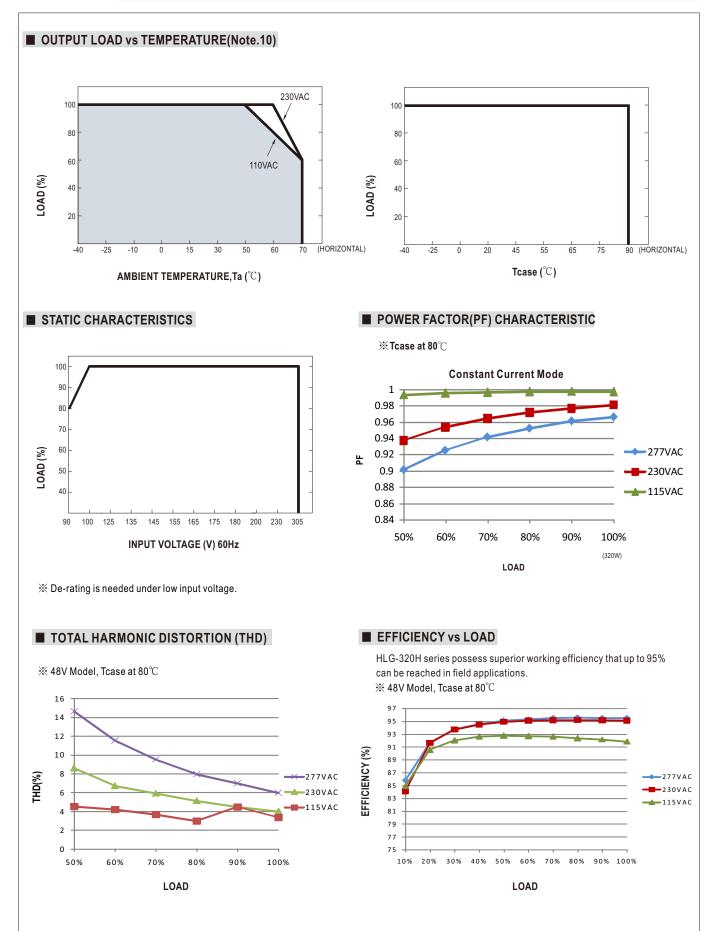





# **■** LIFETIME

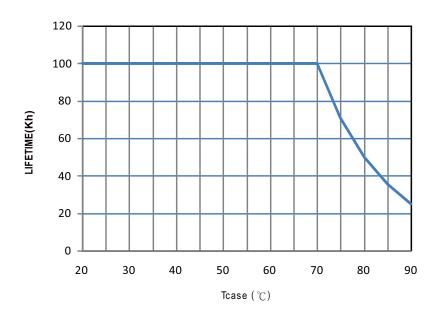



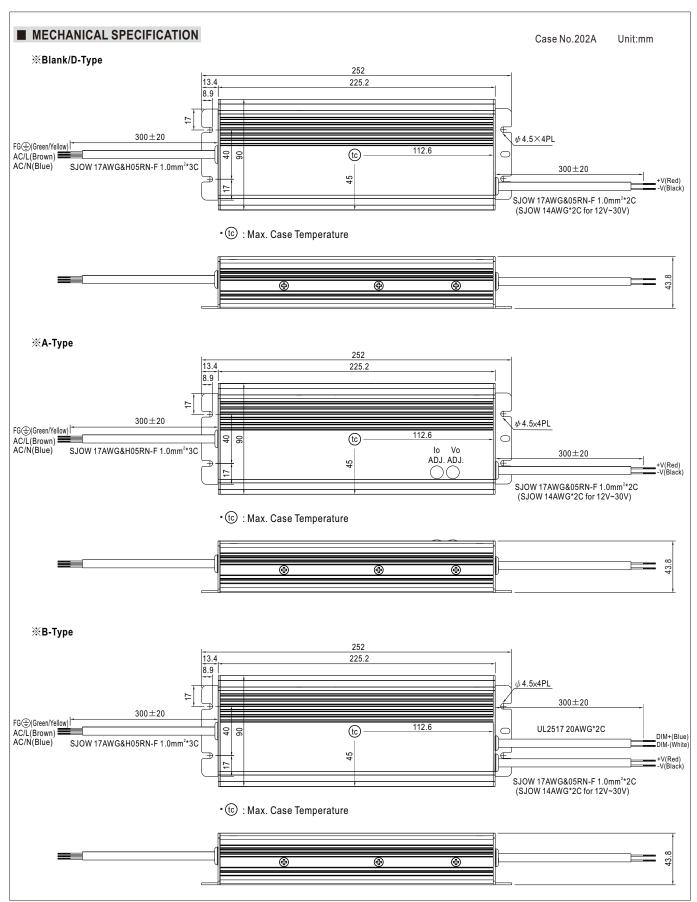



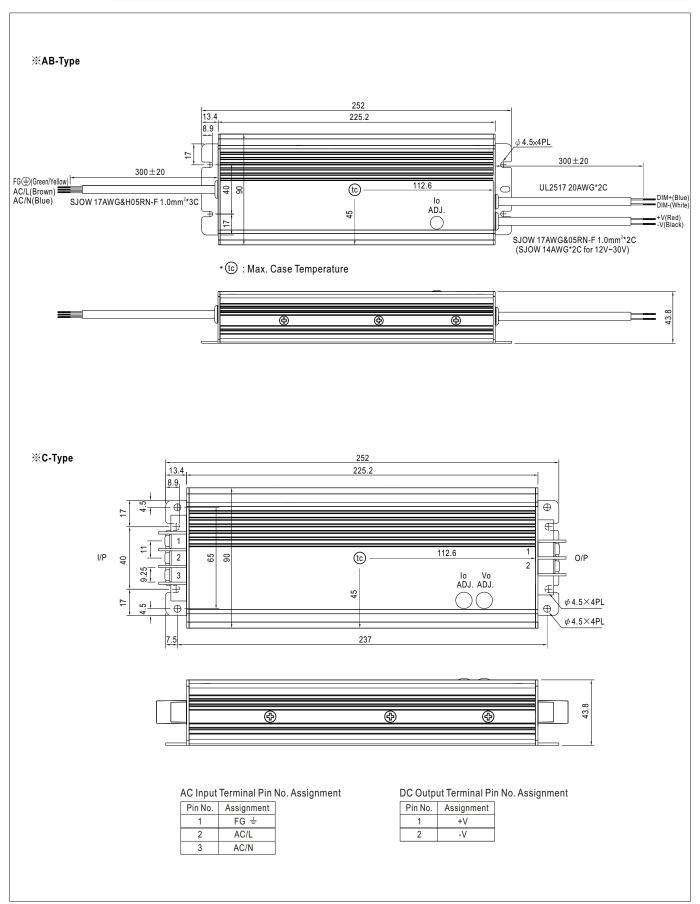





#### ■ WATERPROOF CONNECTION

#### Waterproof connector

 $Water proof connector can be assembled on the output cable of HLG-320H \ to operate in \ dry/wet/damp \ or outdoor \ environment.$ 

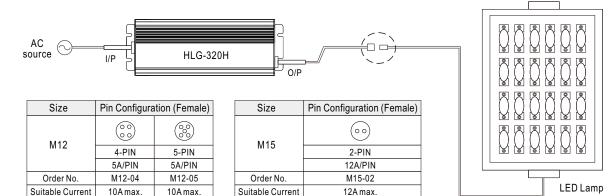


#### **X** Cable Joiner

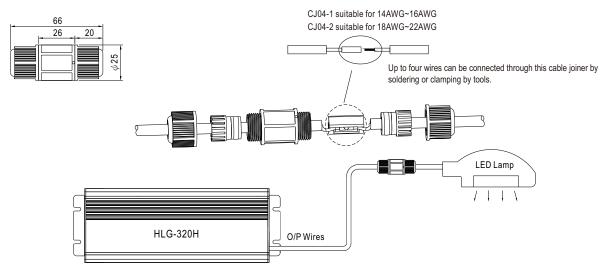

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

#### **※** Junction Box Option

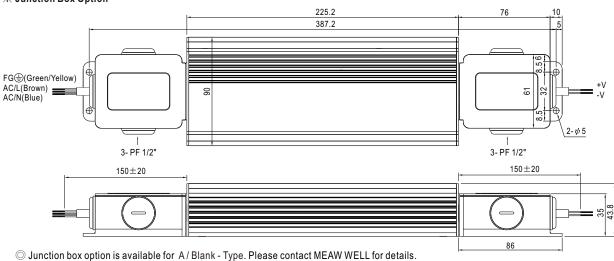

### ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html